



Photometry


Beam angle: 50°
Delivered Lumens: 1188 lumens
CCT: 4000K
CRI: 90
Power: 12W
Efficacy: 99lm/W

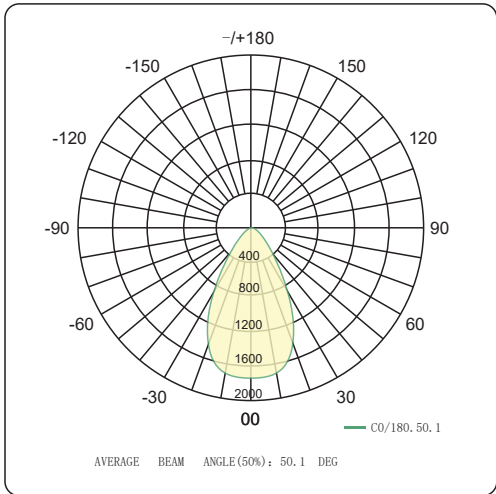

Beam angle: 35°
Delivered Lumens: 1104 lumens
CCT: 4000K
CRI: 90
Power: 12W
Efficacy: 92lm/W

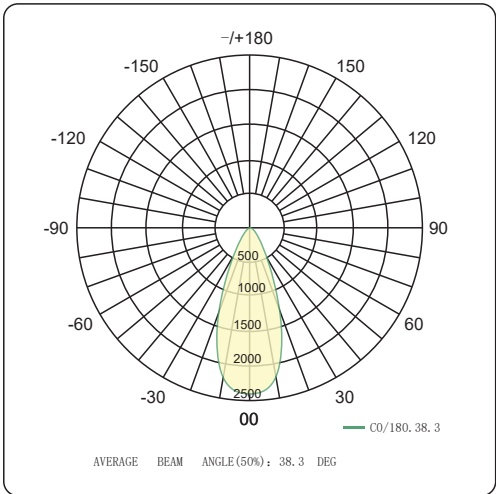


Beam angle: 25°
Delivered Lumens: 756 lumens
CCT: 4000K
CRI: 97
Power: 12W
Efficacy: 63lm/W

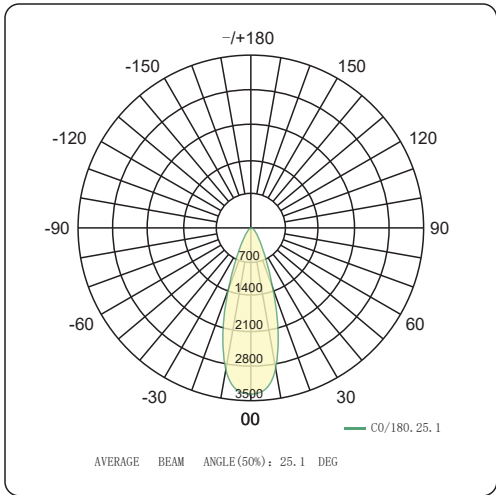

ACCESSORIES

Brackets for New-Construction (4-legs)

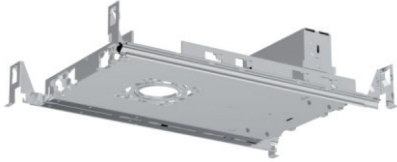


NCP-SR3-R21

For trim&trimless


Cut out:

Round: Ø 3" (Ø 77mm)
Ø 2" (Ø 62mm)
Ø 1" (Ø 50mm)

Square: □ 3" (□ 77mm)

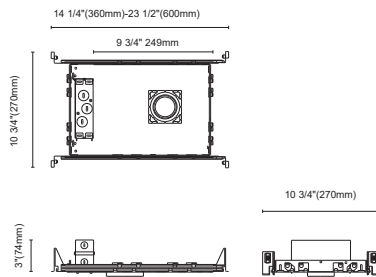

IC-BOX for New-Construction (4-legs)

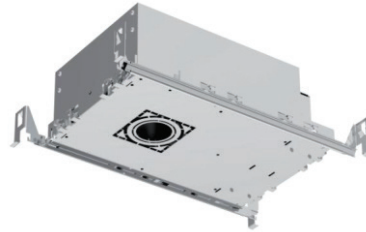


NCBX-SR3-R21

For trim&trimless





Cut out:

Round: Ø 3" (Ø 77mm)
Ø 2" (Ø 62mm)
Ø 1" (Ø 50mm)

Square: □ 3" (□ 77mm)

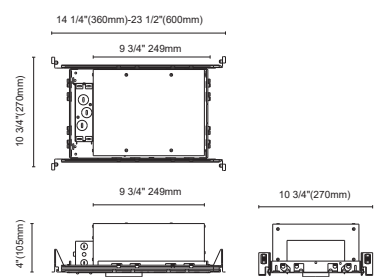

Cut out



Brackets for New-Construction




For trim & trimless

Cut out:

Round: Ø 77mm*2 (Ø 77mm*2)



Square: □ 77mm*2 (□ 77mm*2)

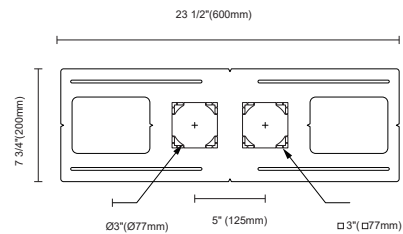

Remark

Tailored brackets are available with a reasonable surcharge, details as below

- The customized bracket dimensions are still the same as the existing ones, 600*200mm
- Hole sizes can be customized within the range of 25-100mm
- Holes quantity can be indicated, 1-7pcs
- Holes' positions on the bracket can be done as requests

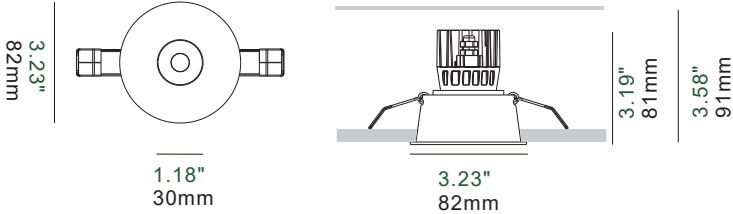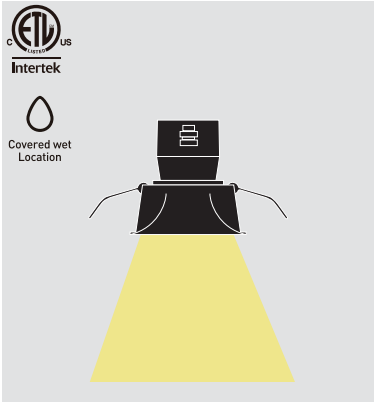

Microflange

